

8600-MO-AF • 8600-ME-AF • 8600-VE-AF (5 PLY)

AGRIFIBRE CORE, FOR INTENSIVE USE

1 STILES: 1/8" (3 mm) hardwood or thick veneer, longitudinally laminated by hot pressing with type 1 structural glue, as per ASTM-D5456-93 (LVL FSC) or laminated strand lumber (LSL), including a **7/8" (22 mm)** piece of hardwood, for a total width of **1 3/16" (30 mm)**:

MO: Manufacturer's choice

ME: Matched with faces

VE: Covered with 1/32" (0.7938 mm) of wood veneer, matched with faces

2 TOP AND BOTTOM RAILS: 1 3/16" (30 mm) in wood or SCL, manufacturer's choice (LVL FSC) or (LSL)

3 CORE: Agrifibre (UFF). **Neutral FSC.**

4 FACES: Wood veneer (choice of face veneers; 2 ply plywood), hardboard panel or plastic laminate glued to composite crossband. Available UFF/FSC

LOCK BLOCK: Integrated

GLUE: Type 1 PVA Cross-link (UFF)

INTERIOR USE

REFERENCE FPC-5/FPC-7 (AWI/AWMAC)

WARRANTY: LIFETIME

OPTIONS

| 20 minute fire rating, specify 8620-MO/ME/VE-AF

| Wood veneer glued to veneer plywood (3 ply plywood)

| ** To get M.R. 7.0, specify FSC wood veneer faces

| *** To get I.E.Q. 4.4, specify UFF or UFF/FSC wood veneer faces

NOTE


| Specify when M.R. 5.1/5.2/6.0 is required and/or for regional contribution (800 km from Mankato, MN, USA). Contact us.

| Dimensions are nominal before trimming




LEED ELIGIBLE CREDITS	M.R.		I.E.Q.		Standards meet or exceed: A.W.S. section 9, October 1, 2009; W.D.M.A. 1.S.1A-04 and CSA 0132.2 90		
	4.1	4.2	5.1	5.2		6.0	7.0
	✓	✓	✓	✓	✓	**	***

1 STILES MO/ME

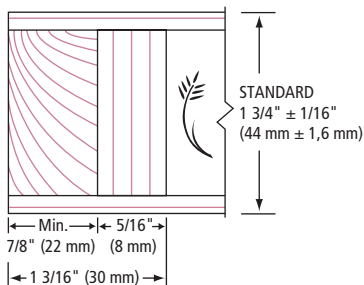

1 STILES VE

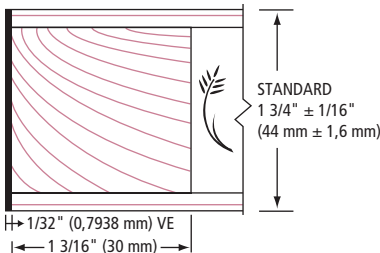

2 RAILS

