

# 9100-MO (5 PLY)

## HOLLOW CORE FOR MODERATE USE

- ❶ **STILES:** 1 3/16" (30 mm) clear, finger-jointed, low-density wood
- ❷ **TOP AND BOTTOM RAILS:** 1 3/16" (30 mm) low-density wood or SCL, (LVL FSC) or laminated strand lumber (LSL), manufacturer's choice
- ❸ **CORE:** 4 3/4" (120 mm) honeycomb (100% recycled)
- ❹ **FACES:** Wood veneer (choice of face veneers: 2 ply plywood), hardboard panel or plastic laminate glued to composite crossband. Available UFF/FSC

**LOCK BLOCK:** Lock materials manufacturer's choice. Low-density wood parts 4 1/4" (108 mm) wide x 20" (508 mm) long (including stile)

**GLUE:** Type 1 PVA Cross-link (UFF)

### INTERIOR USE


**WARRANTY:** 3 years

### OPTIONS

- | Lock block on both sides
- | Wood veneer glued to veneer plywood (3 ply plywood)
- | \* To get M.R. 4.1/4.2, specify 2 ply faces or recycled hardboard panel
- | \*\* To get M.R. 7.0, specify FSC wood veneer faces
- | \*\*\* To get I.E.Q. 4.4, specify UFF or UFF/FSC wood veneer faces


### NOTE

| Dimensions are nominal before trimming

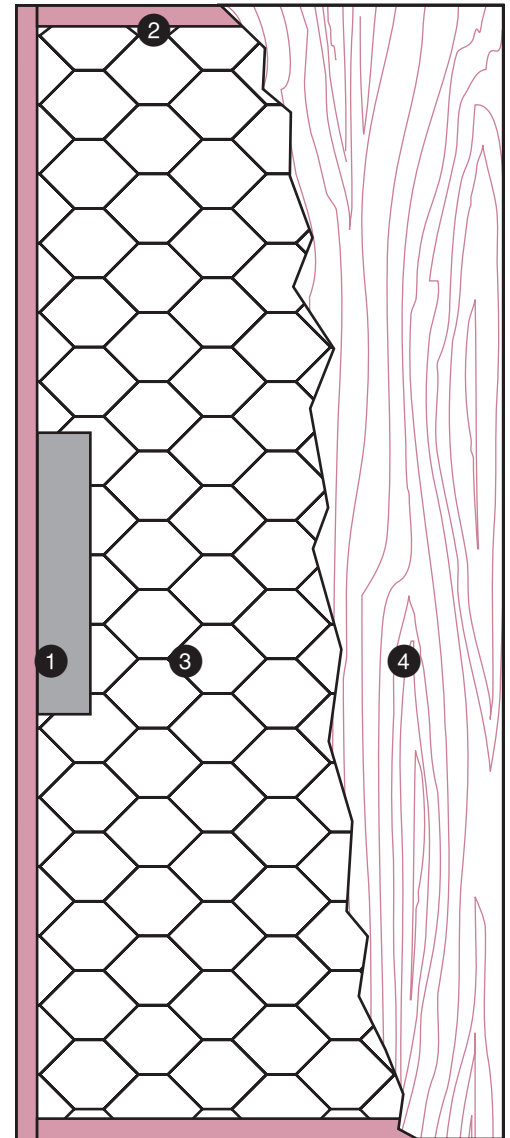

LEED ELIGIBLE CREDITS	4.1		4.2		M.R.			I.E.Q.
	*	*	✓	✓		**	***	
					5.1	5.2	6.0	7.0
								4.4 (UFF)

### ❶ STILES MO

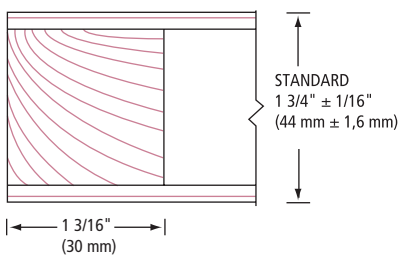

### ❷ RAILS

