

8500-ME-AF (5 PLY)

AGRIFIBRE CORE, ULTRA HEAVY-DUTY, ANTI-WARPING CONSTRUCTION FOR INTENSIVE USE

- ① **STILES:** 1/8" (3 mm) thick veneer, longitudinally laminated by hot pressing with type 1 structural glue, as per ASTM-D5456-93 (LVL FSC), including a 7/8" (22 mm) piece of hardwood, matched with faces, for a total width of 4 3/16" (107 mm)
- ② **TOP AND BOTTOM RAILS:** 1/8" (3 mm) thick veneer, longitudinally laminated by hot pressing with type 1 structural glue, as per ASTM-D5456-93 (LVL FSC) or laminated strand lumber (LSL), for a total width of 3 5/16" (85 mm)
- ③ **CORE:** Agrifibre (UFF). **Neutral FSC.**
- ④ **FACES:** Wood veneer (choice of face veneers; 2 ply plywood), hardboard panel or plastic laminate glued to composite crossband. Available UFF/FSC

LOCK BLOCK: Integrated

GLUE: Type 1 PVA Cross-link (UFF)

INTERIOR USE

WARRANTY: LIFETIME

OPTIONS

- | 20 minute fire rating, specify 8520-ME-AF
- | Wood veneer glued to veneer plywood (3 ply plywood)
- | Autonomy door available, specify 8513-ME-AF
- | ** To get M.R. 7.0, specify FSC wood veneer faces
- | *** To get I.E.Q. 4.4, specify UFF or UFF/FSC wood veneer faces

NOTE


- | Specify when M.R. 5.1/5.2/6.0 is required and/or for regional contribution (800 km from Mankato, MN, USA). Contact us.
- | Dimensions are nominal before trimming



LEED ELIGIBLE CREDITS	M.R.						I.E.Q.
	4.1	4.2	5.1	5.2	6.0	7.0	4.4 (UFF)
	✓	✓	✓	✓	✓	✘✘	✘✘✘

Standards meet or exceed:
A.W.S. section 9, October 1, 2009;
W.D.M.A. 1.S.1A-04
and CSA 0132.2 90

① STILES ME

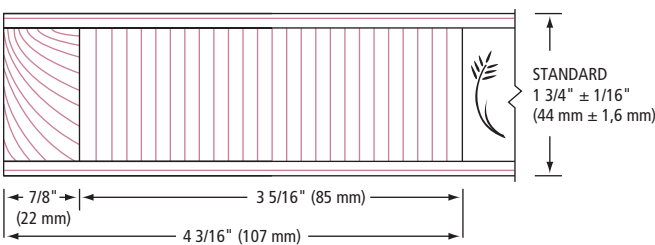

② RAILS

