

Tradition Series

Solid-Wood Jamb – Rated (20 minutes)

J2320A

SINGLE RABBET JAMB (3/4")

- 1 Hardwood
- 2 Door
- 3 Corner rabbet type

SPECIFICATIONS

MINIMUM WALL THICKNESS:

4 9/16" (116 mm) up to 108" high

MINIMUM JAMB THICKNESS: 1 3/8" (35 mm)

ASSEMBLY: Please refer to installation instructions

MAXIMUM OPENING

Single: 48" (1219 mm) x 108" (2743 mm)

Double: 96" (2438 mm) x 108" (2743 mm)

NOTE: Dimensions limitations according to wood species.

CASING: 5/8" (15 mm) x 2 1/2" (64 mm)

SHIPPING: Unassembled (Knock Down)

WRAPPING: Each frame will be shipped in a cardboard box, with 1/32" (1 mm) foam and bundle wrapped.

Installation instructions and peel-and-stick door bumpers are included (mandatory)

WARRANTY: 3 years

NOTE

Mounting brackets are suggested for proper installation.

Installation requires a wood casing of 1/4" x 1 1/2" minimum.

OPTIONS

Other configurations upon request and availability

Mounting brackets available

Pre-machining

Pre-finishing


Subject to evaluation. Contact us.

LEED CONTRIBUTION OPTIONS

Recycled content

FSC (on request)

NAUF or ULEF (on request)

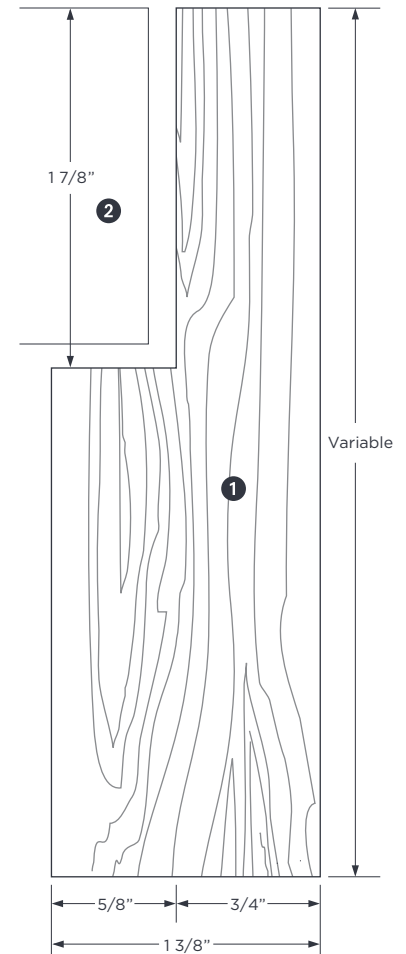

JAMB ASSEMBLY

Head and jamb

