

# LVL CORE

(Extra Heavy Duty)

# 7000-ME / 7020-ME (5 ply)

## 1 PLY LVL (LAMINATED VENEER LUMBER) CORE, ANTI-WARPING, FOR INTENSIVE USE

- ❶ **STILES:** 7/8" (22 mm) wide hardwood, matched with faces. **Bonded to core.**
- ❷ **TOP AND BOTTOM RAILS:** 7/8" (22 mm) in wood or SCL, (LVL) or laminated strand lumber (LSL), manufacturer's choice. **Bonded to core.**
- ❸ **CORE:** 1/8" (3 mm) thick veneer, longitudinally laminated by hot pressing with type 1 structural glue.
- ❹ **FACES:** Wood veneer (choice of face veneers; 2 ply plywood), hardboard panel or plastic laminate glued to composite crossband.

**LOCK BLOCK:** Integrated.

**GLUE:** Type 1 PVA Cross-link.

**INTERIOR** use

**WARRANTY:** Lifetime

**NOTE**

| Dimensions are nominal before trimming.

**OPTIONS**


- | 🔥 20 min fire rating, specify 7020-ME.
- | 3 5/16" (85 mm) LVL or LSL rails (according to hardware).
- | STC sound rating not available.

**LEED CONTRIBUTION OPTIONS**


- | EPD
- | Recycled content
- | FSC
- | NAUF or ULEF (on request)

**PERFORMANCE MEASUREMENT**

- | ANSI/WDMA 1.S.1A
- | ASTM-D1037 and D198-98 (LSL)
- | ASTM-D5456-93 (LVL)
- | AWS
- | Intertek WH-ETL
- | NFPA 80

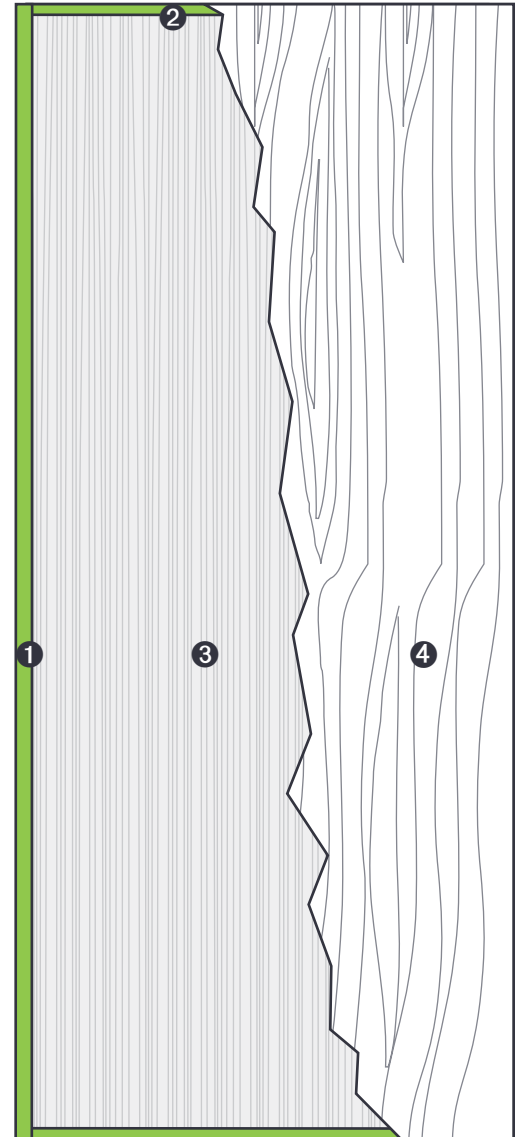

❶ **STILES ME**

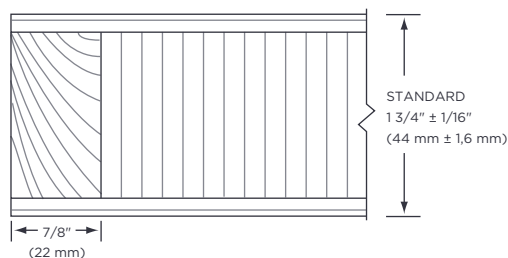

❷ **RAILS**

